



.165" (4.2mm) Power Connector System

Circuits	Dimensional Information	
	Right Angle Header (W/Mtg. Flanges)	Right Angle Header (W/O Mtg. Flanges)
22	<p>42001WRF-22 (w/Mtg. Flanges)</p>	<p>42001WR-22 (w/o Mtg. Flanges)</p>
24	<p>42001WRF-24 (w/Mtg. Flanges)</p>	<p>42001WR-24 (w/o Mtg. Flanges)</p>

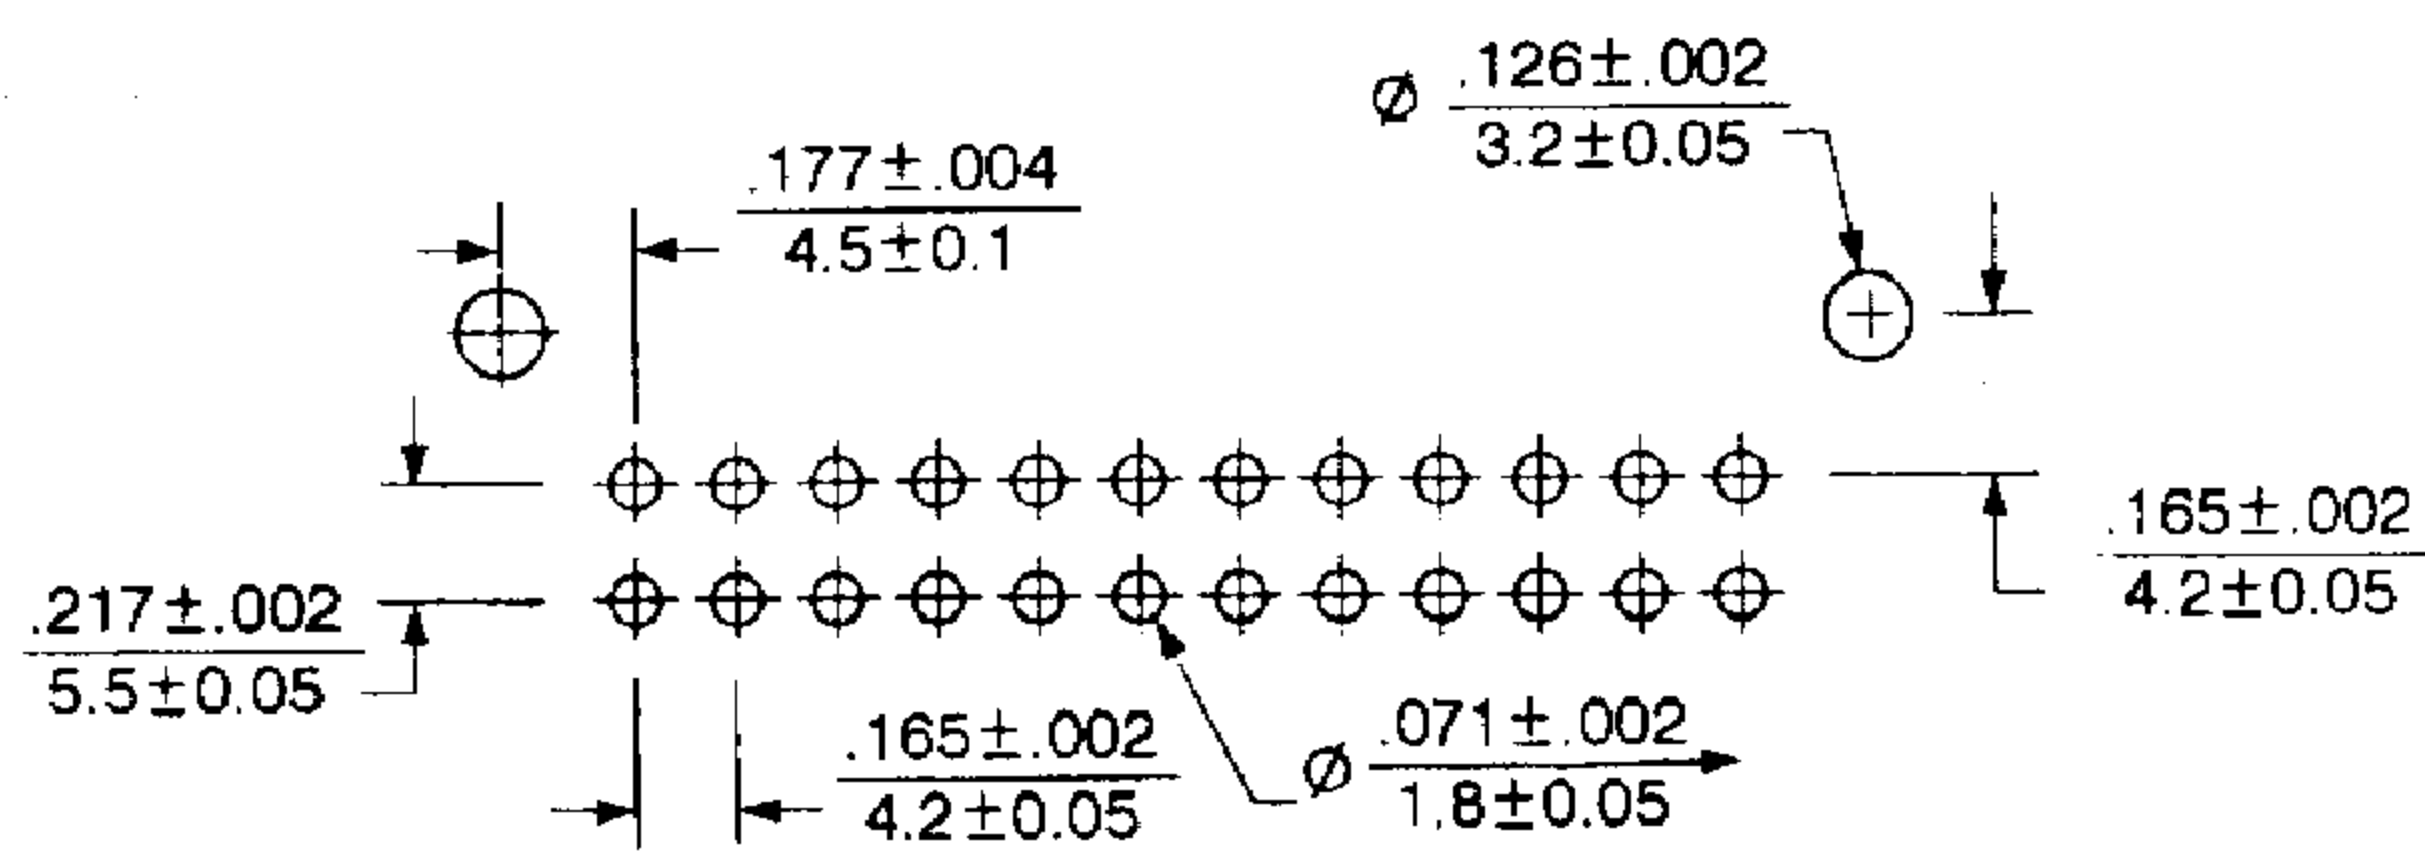

Right Angle Header with Flanges
P.C.B. Hole Dimensions

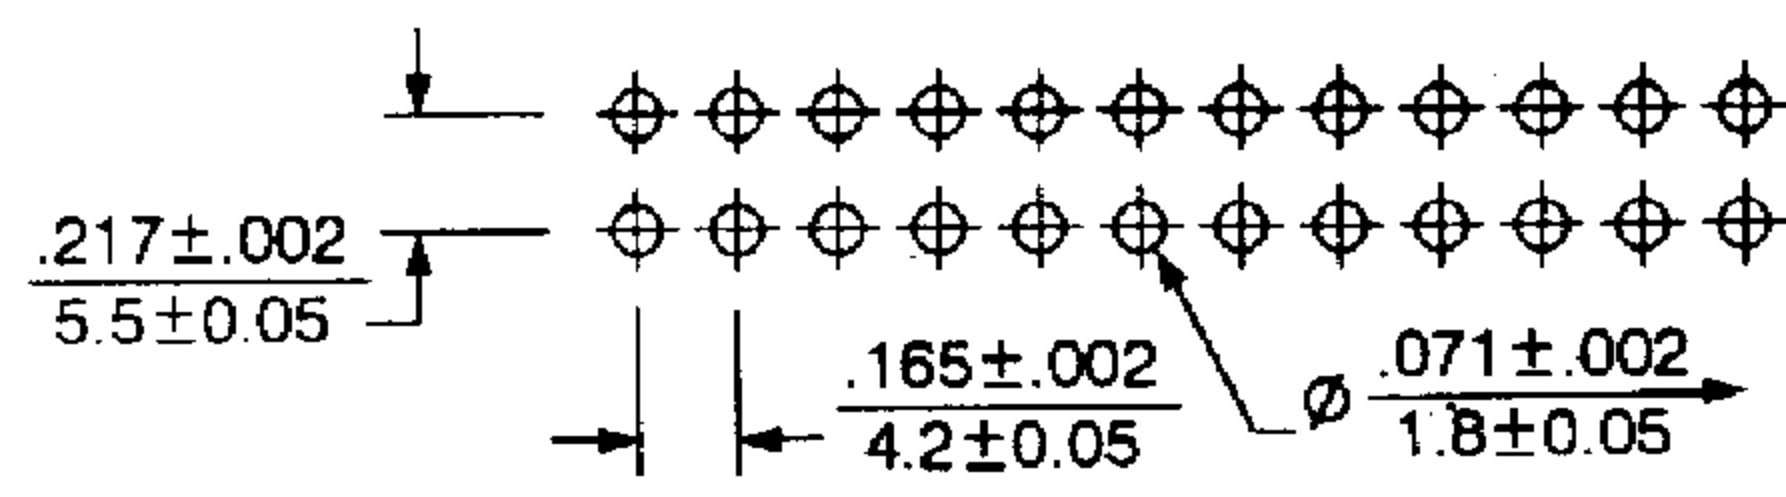

Right Angle Header without Flanges
P.C.B. Hole Dimensions

Dimensional Information - in. (mm)

Circuits	Dim. A	Dim. B	Dim. C	Dim. D	Circuits	Dim. A	Dim. B	Dim. C	Dim. D
2		.213 (5.4)	.354 (9.0)	.606 (15.4)	14	.992 (25.2)	1.205 (30.6)	1.346 (34.2)	1.598 (40.6)
4	.165 (4.2)	.378 (9.6)	.520 (13.2)	.772 (19.6)	16	1.157 (29.4)	1.370 (34.8)	1.512 (38.4)	1.764 (44.8)
6	.331 (8.4)	.543 (13.8)	.685 (17.4)	.937 (23.8)	18	1.323 (33.6)	1.535 (39.0)	1.677 (42.6)	1.929 (49.0)
8	.496 (12.6)	.709 (18.0)	.850 (21.6)	1.102 (28.0)	20	1.488 (37.8)	1.701 (43.2)	1.843 (46.8)	2.094 (53.2)
10	.681 (16.8)	.874 (22.2)	1.016 (25.8)	1.268 (32.2)	22	1.654 (42.0)	1.866 (47.4)	2.008 (51.0)	2.260 (57.4)
12	.827 (21.0)	1.039 (26.4)	1.181 (30.0)	1.433 (36.4)	24	1.819 (46.2)	2.031 (51.6)	2.173 (55.2)	2.425 (61.6)

Ordering Information

Part No.	Features
42001WR-xx	Without Mtg. Flanges
42001WRF-xx	With Mtg. Flanges

Replace "xx" with number of circuits, 02-24