

.079"(2.0mm) Crimp Terminal Housing

Specifications:


- Current rating: 1A AC, DC max.
- Voltage rating: 250V AC, DC
- Dielectric Strength: 800V AC/minute
- Applicable P. C. board thickness: .063"(1.6mm)
- Insulation resistance: 1000M Ω min.
- Contact resistance: 20m Ω max.
- Temperature range: -25 °C ~ 95 °C max.
(including temperature rise)

20007T Series Crimp Terminal

- Material: Phosphor bronze
- Finished: Gold flash
- Used in 20007H-N series housings
- Wire range: AWG #26 ~ #30
- Thickness: 0.2mm

Ordering Information


Part No.	Description
20007T1	Used in 4501(02 ~ 19), 4521(04 ~ 18)
20007T2	Used in 4501(20 ~ 40), 4521(20 ~ 80)

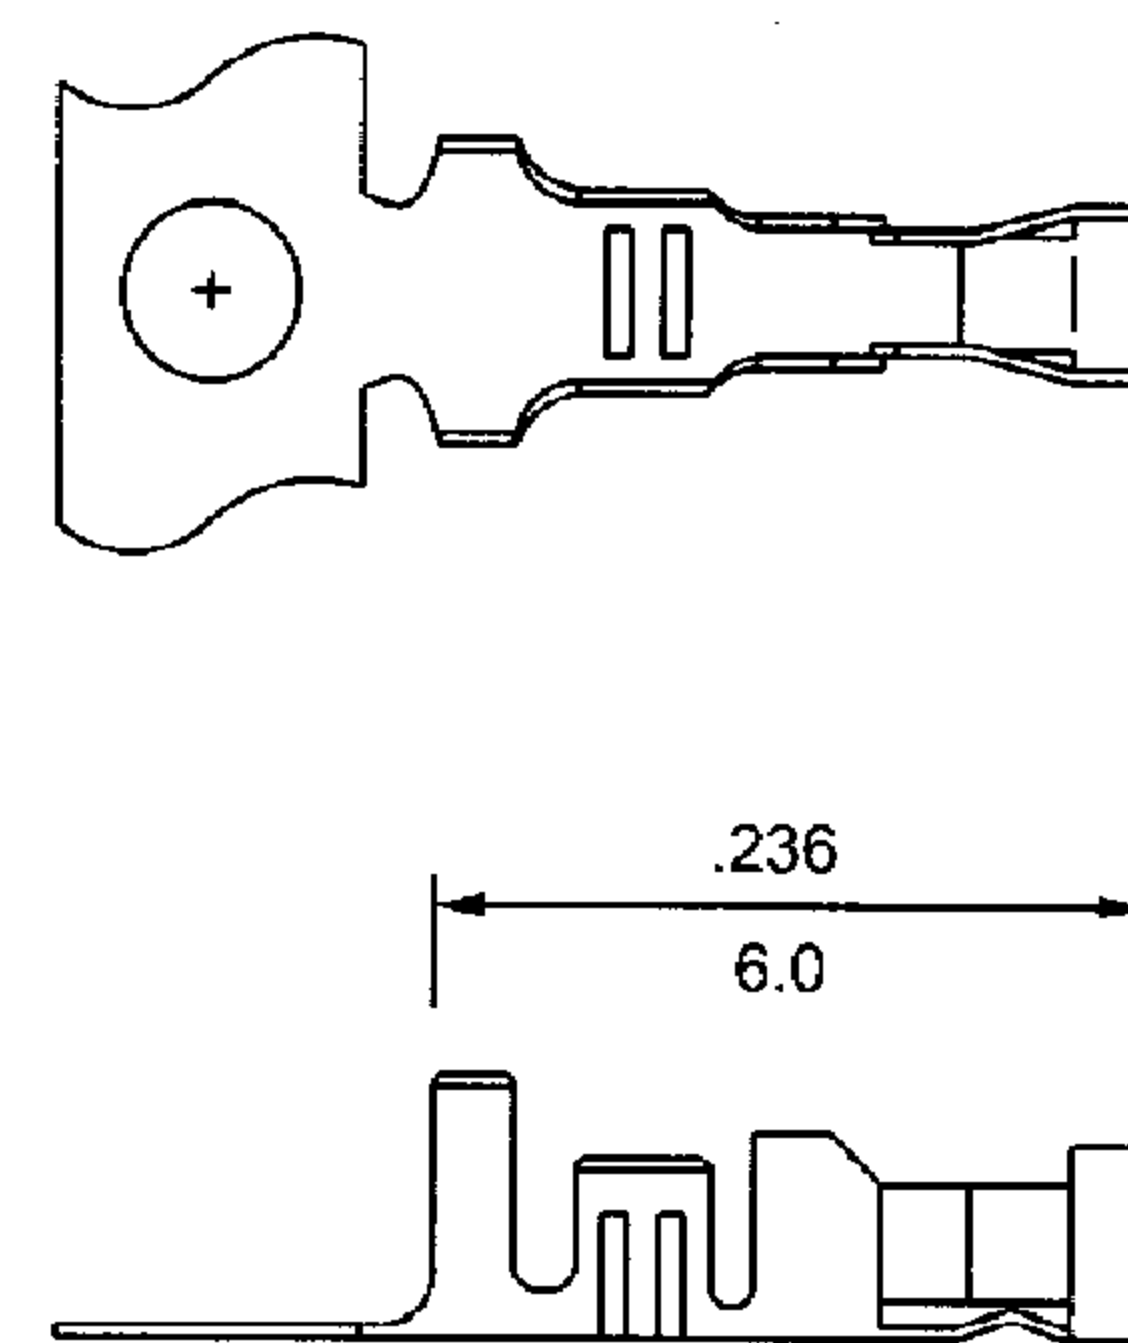

inches
mm

20007H-N / 20007HP-N Series Single Row Crimp Terminal Housing

- 2 ~ 40 circuits available
- Material: Glass fiber polyester UL 94V-0
- Standard color: Black
- Accepts 20007T series terminals
- Mates with 20012W-N series headers

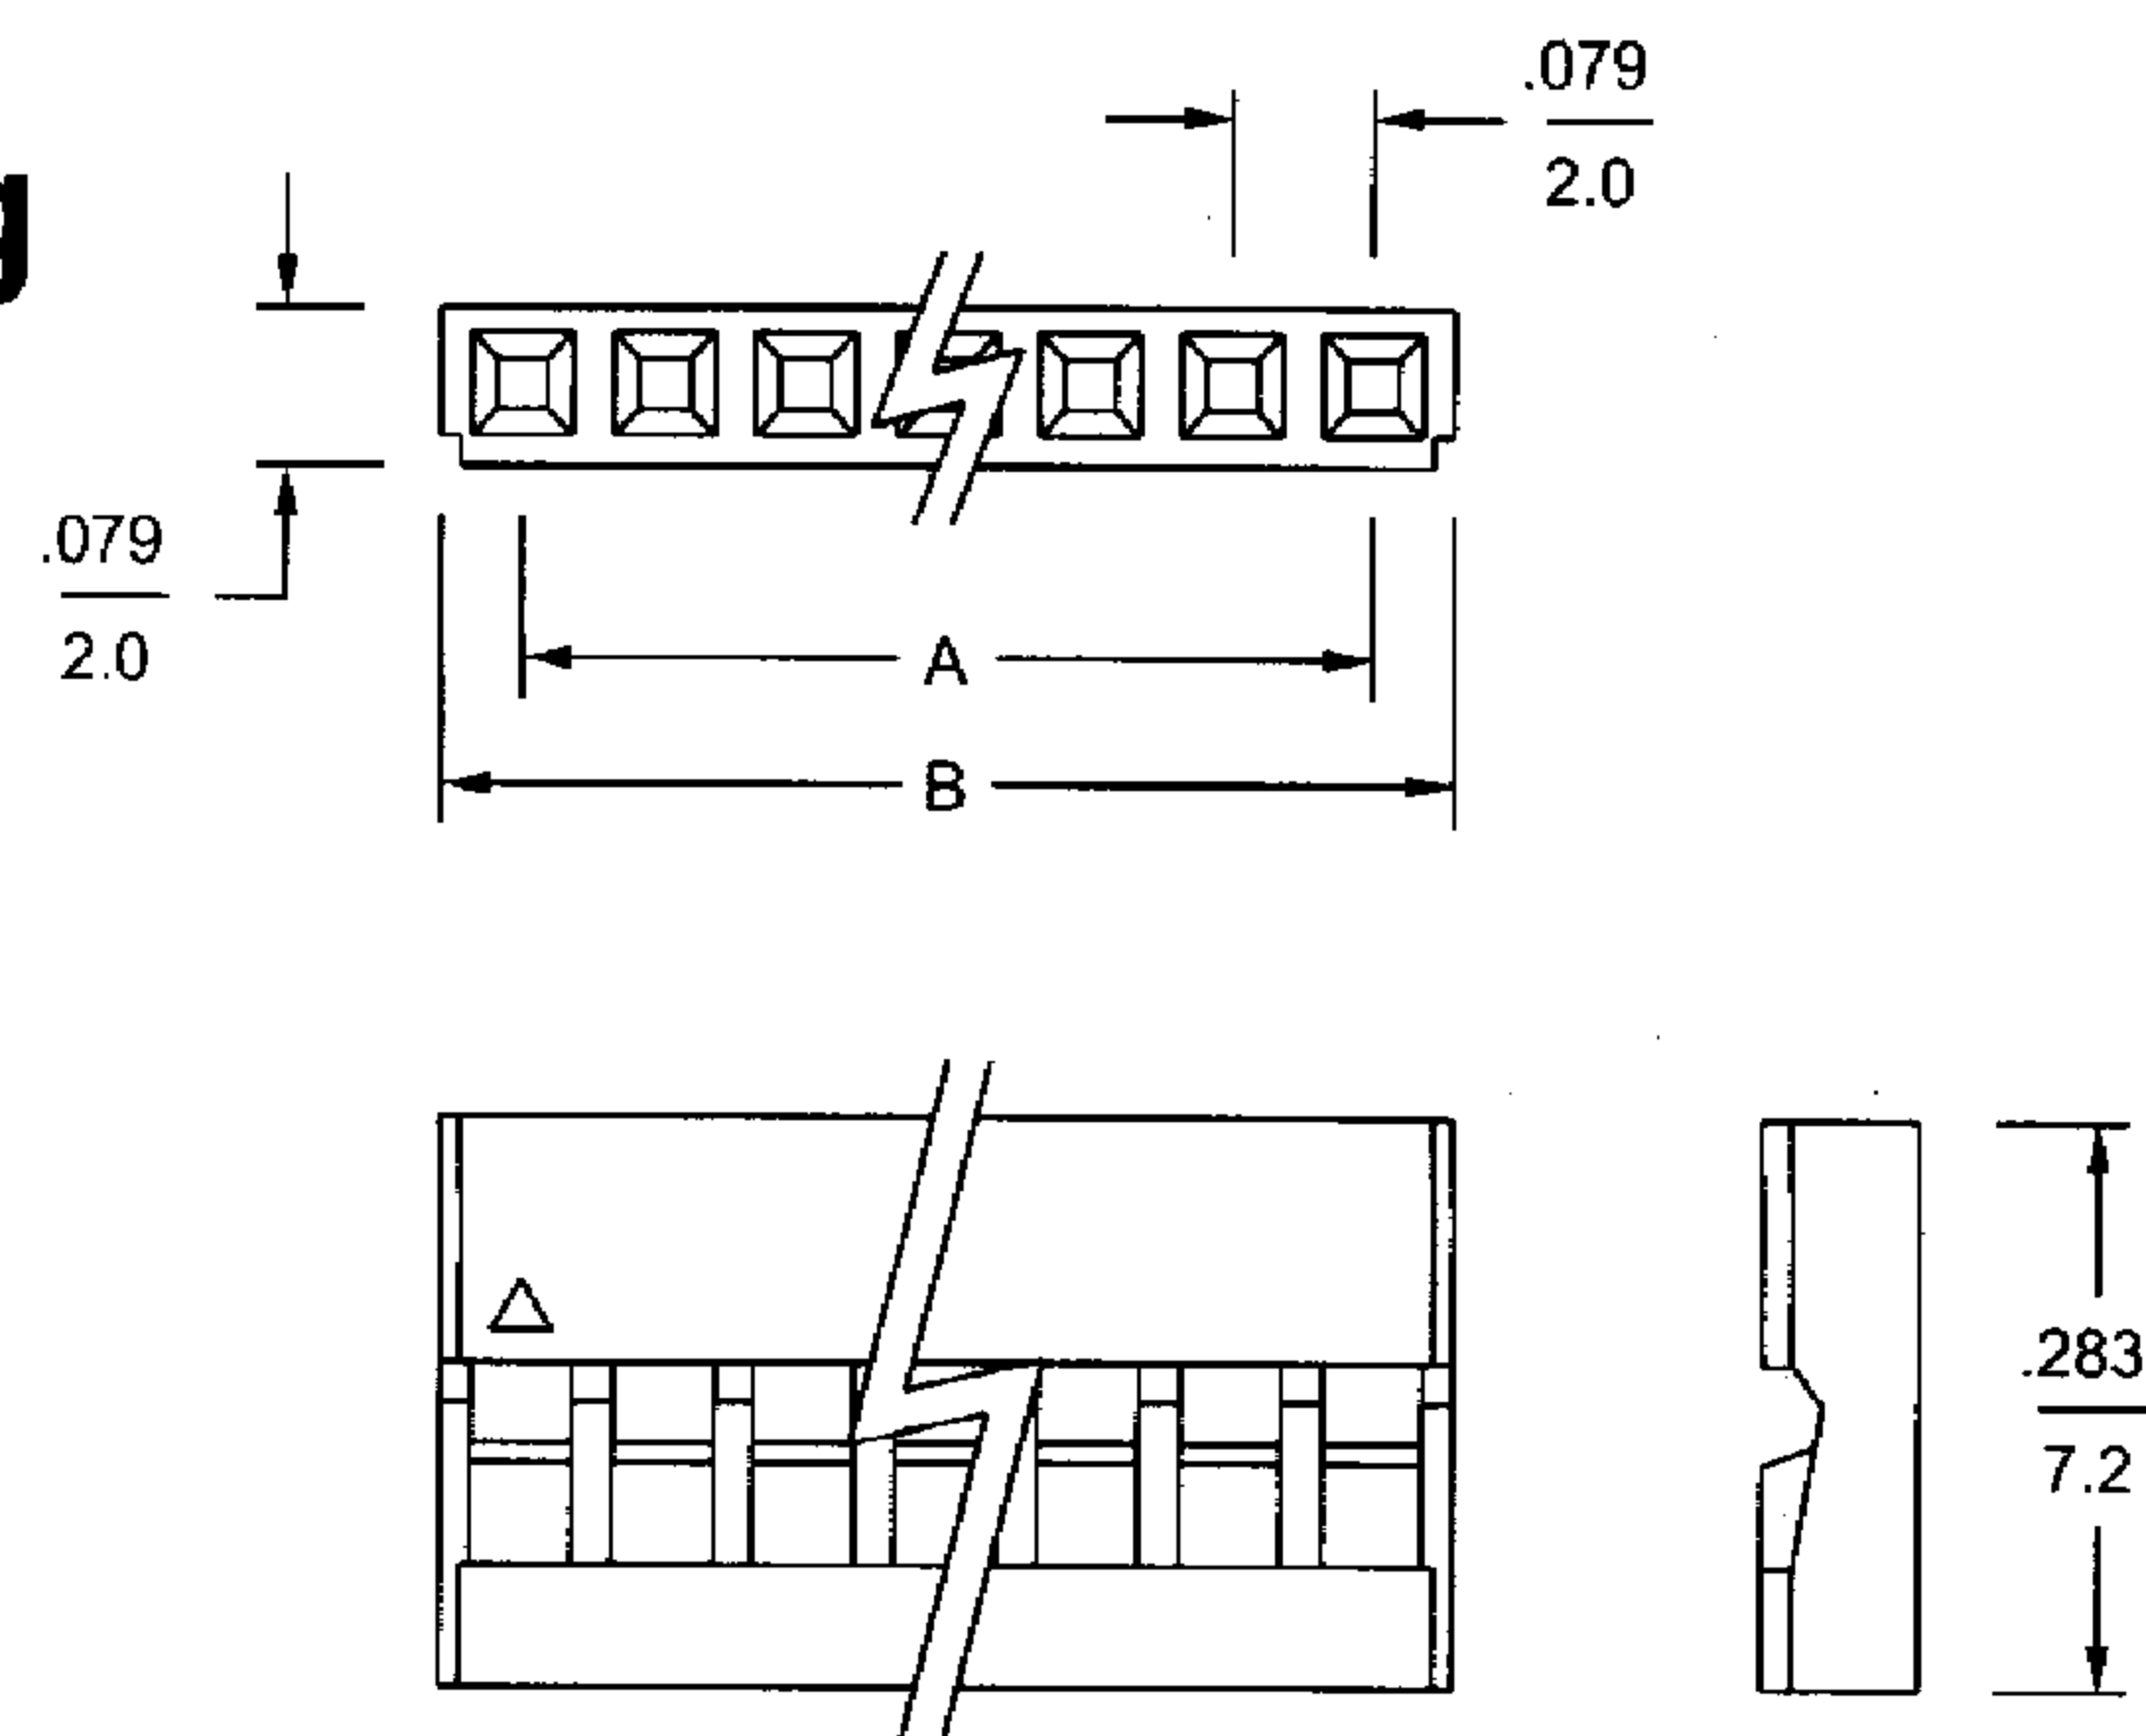

inches
mm

Dimensional Information - in (mm)

Circuits	Dim. A	Dim. B	Circuits	Dim. A	Dim. B	Circuits	Dim. A	Dim. B
2	0.079 (2.0)	0.157 (4.0)	15	1.102 (28.0)	1.181 (30.0)	28	2.126 (54.0)	2.205 (56.0)
3	0.157 (4.0)	0.236 (6.0)	16	1.181 (30.0)	1.260 (32.0)	29	2.205 (56.0)	2.283 (58.0)
4	0.236 (6.0)	0.315 (8.0)	17	1.260 (32.0)	1.339 (34.0)	30	2.283 (58.0)	2.362 (60.0)
5	0.315 (8.0)	0.394 (10.0)	18	1.339 (34.0)	1.417 (36.0)	31	2.362 (60.0)	2.441 (62.0)
6	0.394 (10.0)	0.472 (12.0)	19	1.417 (36.0)	1.496 (38.0)	32	2.441 (62.0)	2.520 (64.0)
7	0.472 (12.0)	0.551 (14.0)	20	1.496 (38.0)	1.575 (40.0)	33	2.520 (64.0)	2.598 (66.0)
8	0.551 (14.0)	0.630 (16.0)	21	1.575 (40.0)	1.654 (42.0)	34	2.598 (66.0)	2.677 (68.0)
9	0.630 (16.0)	0.709 (18.0)	22	1.654 (42.0)	1.732 (44.0)	35	2.677 (68.0)	2.756 (70.0)
10	0.709 (18.0)	0.787 (20.0)	23	1.732 (44.0)	1.811 (46.0)	36	2.756 (70.0)	2.835 (72.0)
11	0.787 (20.0)	0.866 (22.0)	24	1.811 (46.0)	1.890 (48.0)	37	2.835 (72.0)	2.913 (74.0)
12	0.866 (22.0)	0.945 (24.0)	25	1.890 (48.0)	1.969 (50.0)	38	2.913 (74.0)	2.992 (76.0)
13	0.945 (24.0)	1.024 (26.0)	26	1.969 (50.0)	2.047 (52.0)	39	2.992 (76.0)	3.071 (78.0)
14	1.024 (26.0)	1.102 (28.0)	27	2.047 (52.0)	2.126 (54.0)	40	3.071 (78.0)	3.150 (80.0)