

# .138"(3.50mm) Crimp Terminal Housing



## Specifications:

- Current rating: 1AAC, DC
- Voltage rating: 1400V AC, DC
- Dielectric withstanding voltage: 3800V AC/minute
- Insulation resistance: 1000MΩ Min.
- Contact resistance: 10mΩ Max.  
After environmental testing /20mΩ Max.
- Ambient temperature range: -25 °C ~ 85 °C  
(including temperature rise)

## 35001TF Series Female Crimp Terminal




inches  
mm

- Finished: Tin-plated
- Used in 35001HM-02 housing
- Wire range: #24 ~ #28 AWG
- Thickness: 0.2mm

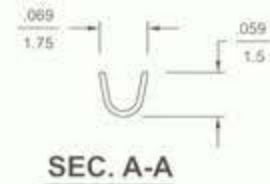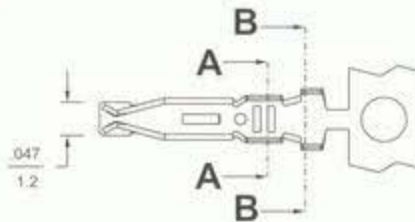

### Ordering Information

Part No.	Material
35001TF	Brass
35001TFP	Phosphor Bronze

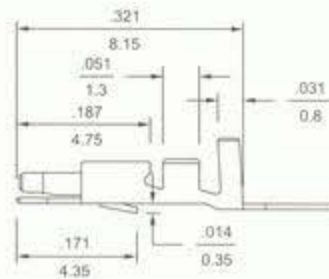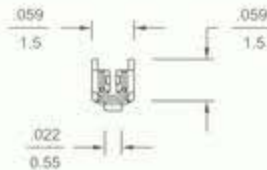

## 35001HM-02 Crimp Terminal Housing

inches  
mm

- Material: UL 94V-0 nylon 66
- Accepts 35001TF terminal
- Mates with 35001HF housing
- Mates with 35001WV headers

