


.156" (3.96mm) Headers

39601WSO-N Series Straight Pin Header

- 2 ~ 12 circuits available
- UL 94V-2 nylon 66
- .045" (1.14mm) straight square wire pin
- Tin plated brass pins. Plating options available
- Mate with 39601H-N, 39603H-N, 39604H-N series housing

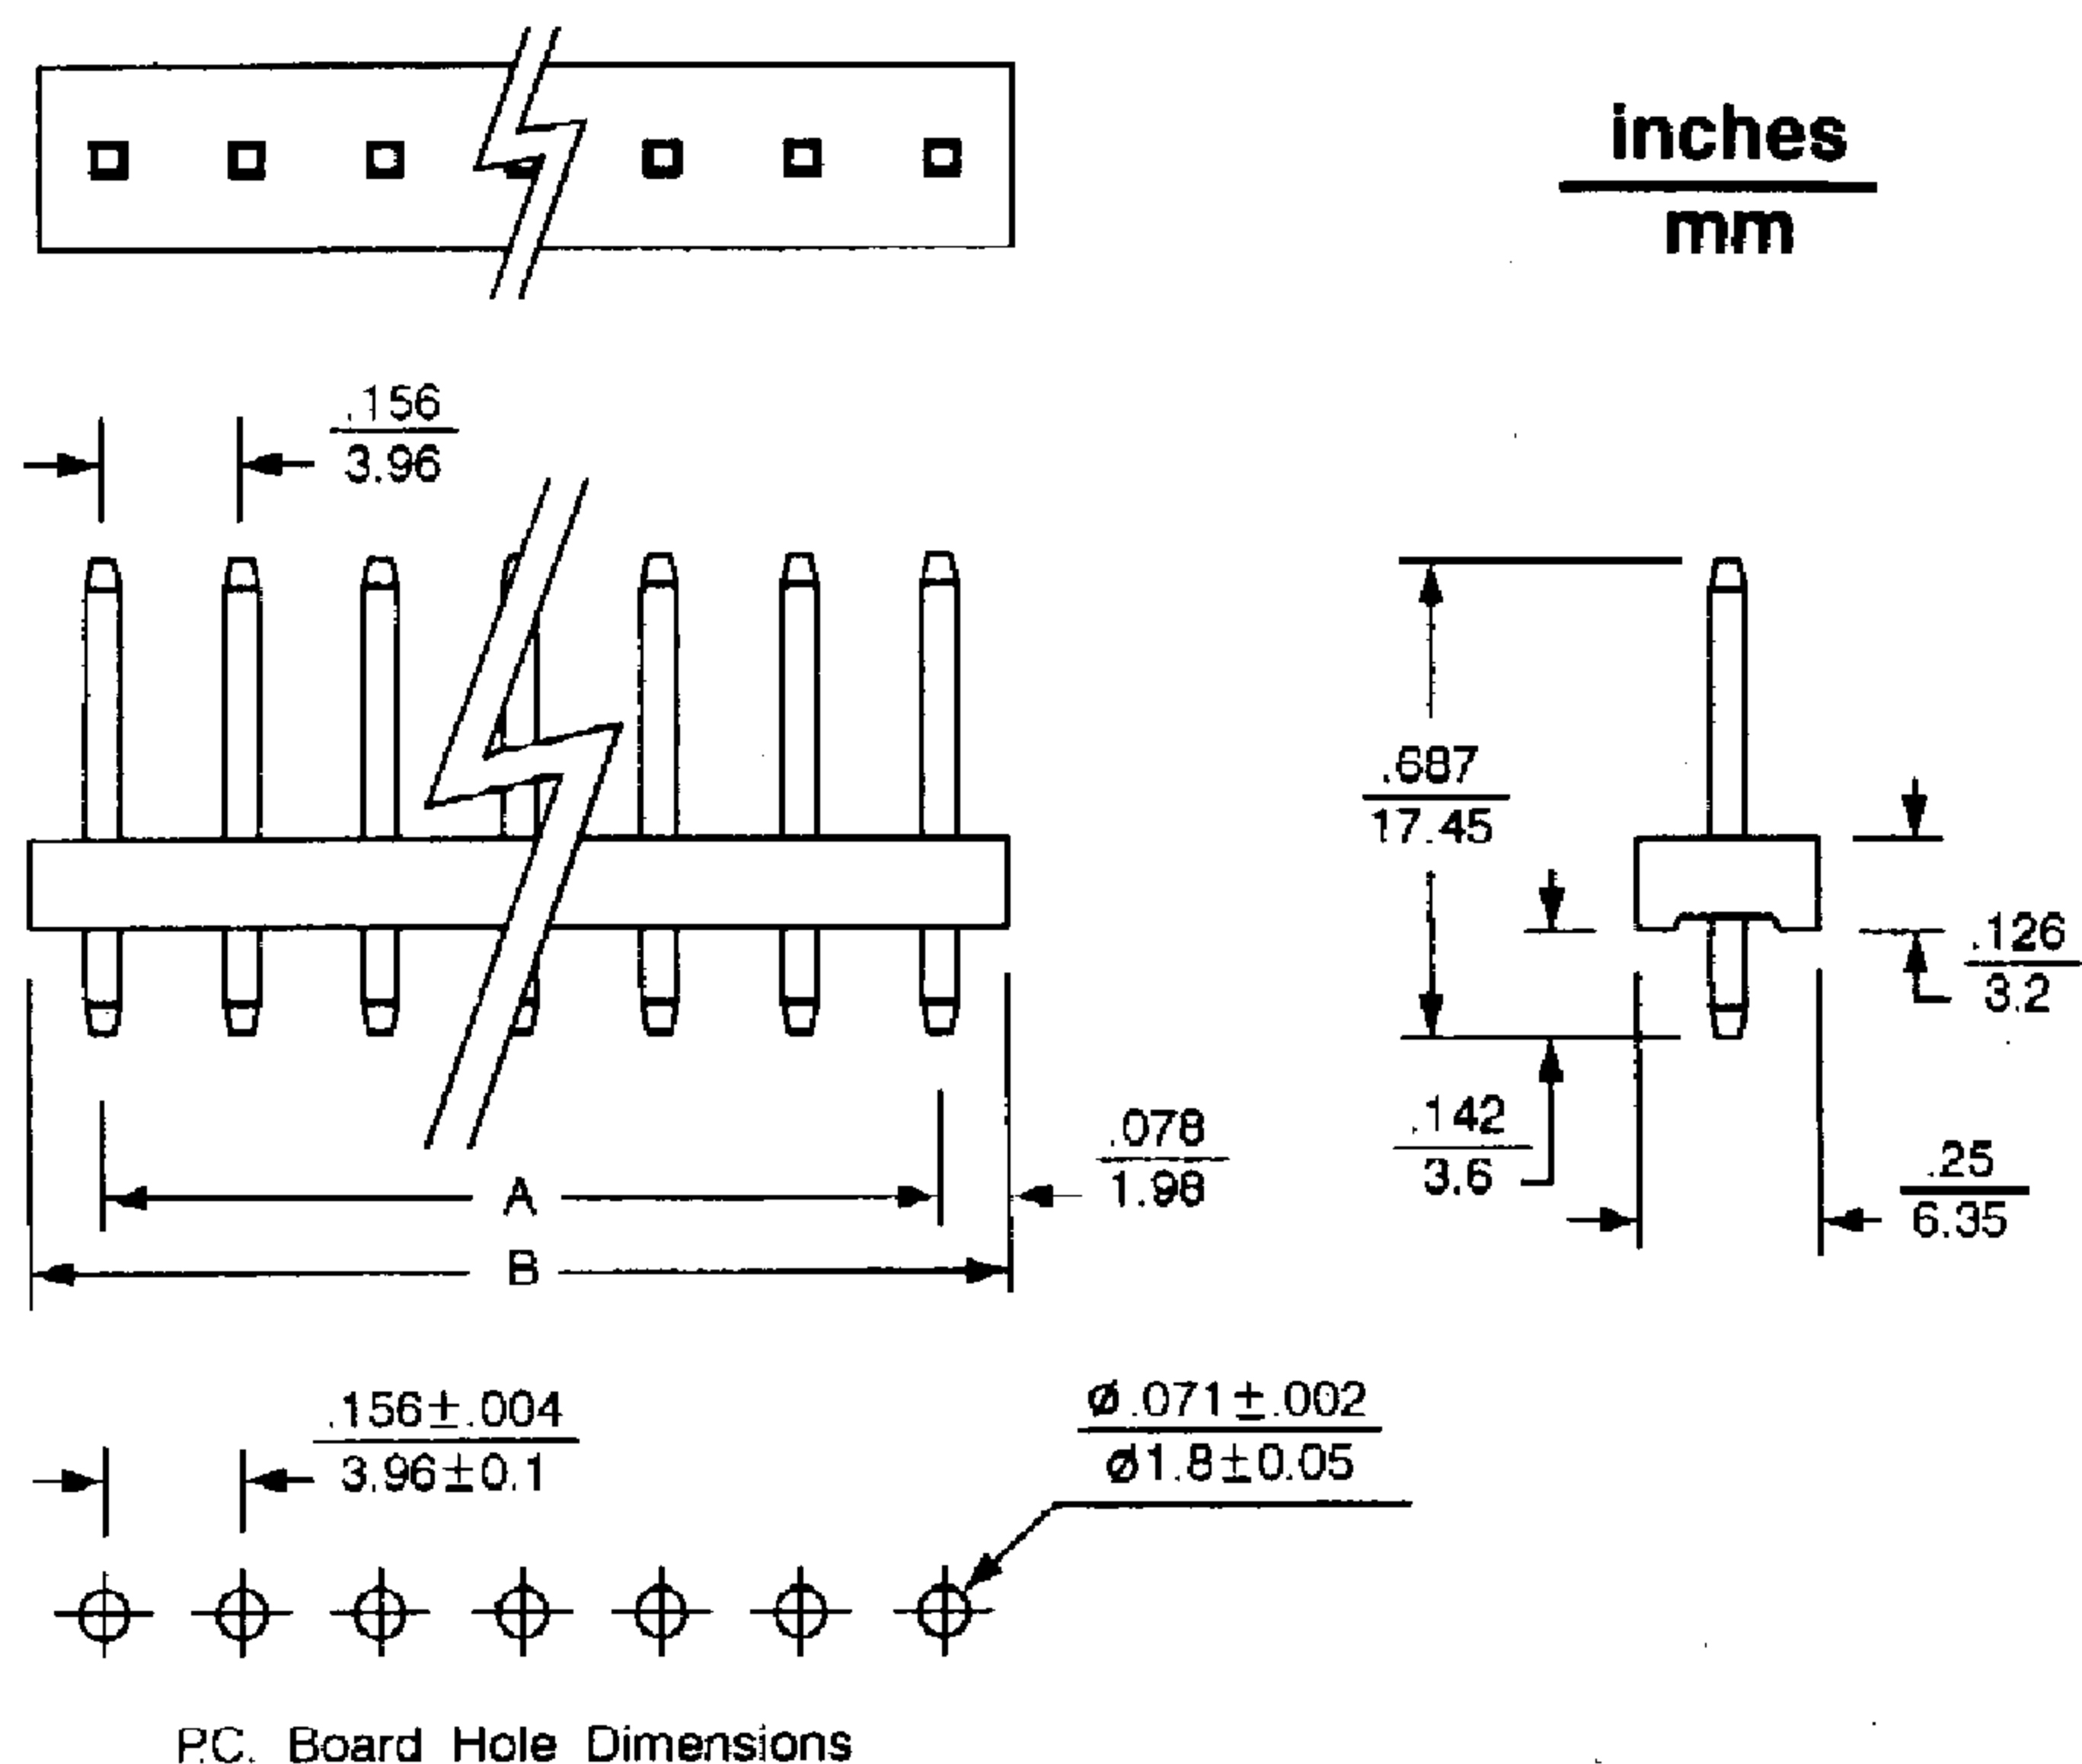


Dimensional Information - in (mm)

Circuits	Dim. A	Dim. B	Circuits	Dim. A	Dim. B	Circuits	Dim. A	Dim. B
2	.156 (3.96)	.312 (7.92)	6	.780 (19.80)	.935 (23.76)	10	1.403 (35.64)	1.559 (39.60)
3	.312 (7.92)	.468 (11.88)	7	.935 (23.76)	1.091 (27.72)	11	1.559 (39.60)	1.715 (43.56)
4	.468 (11.88)	.624 (15.84)	8	1.091 (27.72)	1.247 (31.68)	12	1.715 (43.56)	1.871 (47.52)
5	.624 (15.84)	.780 (19.80)	9	1.247 (31.68)	1.403 (35.64)			

39601WRO-N Series Right Angle Pin Header

- 2 ~ 12 circuits available
- UL 94V-2 nylon 66
- Rt. angle .045" (1.14mm) square wire pin
- Tin plated brass pins. Plating options available
- Mate with 39601H-N, 39603H-N, 39604H-N series housing

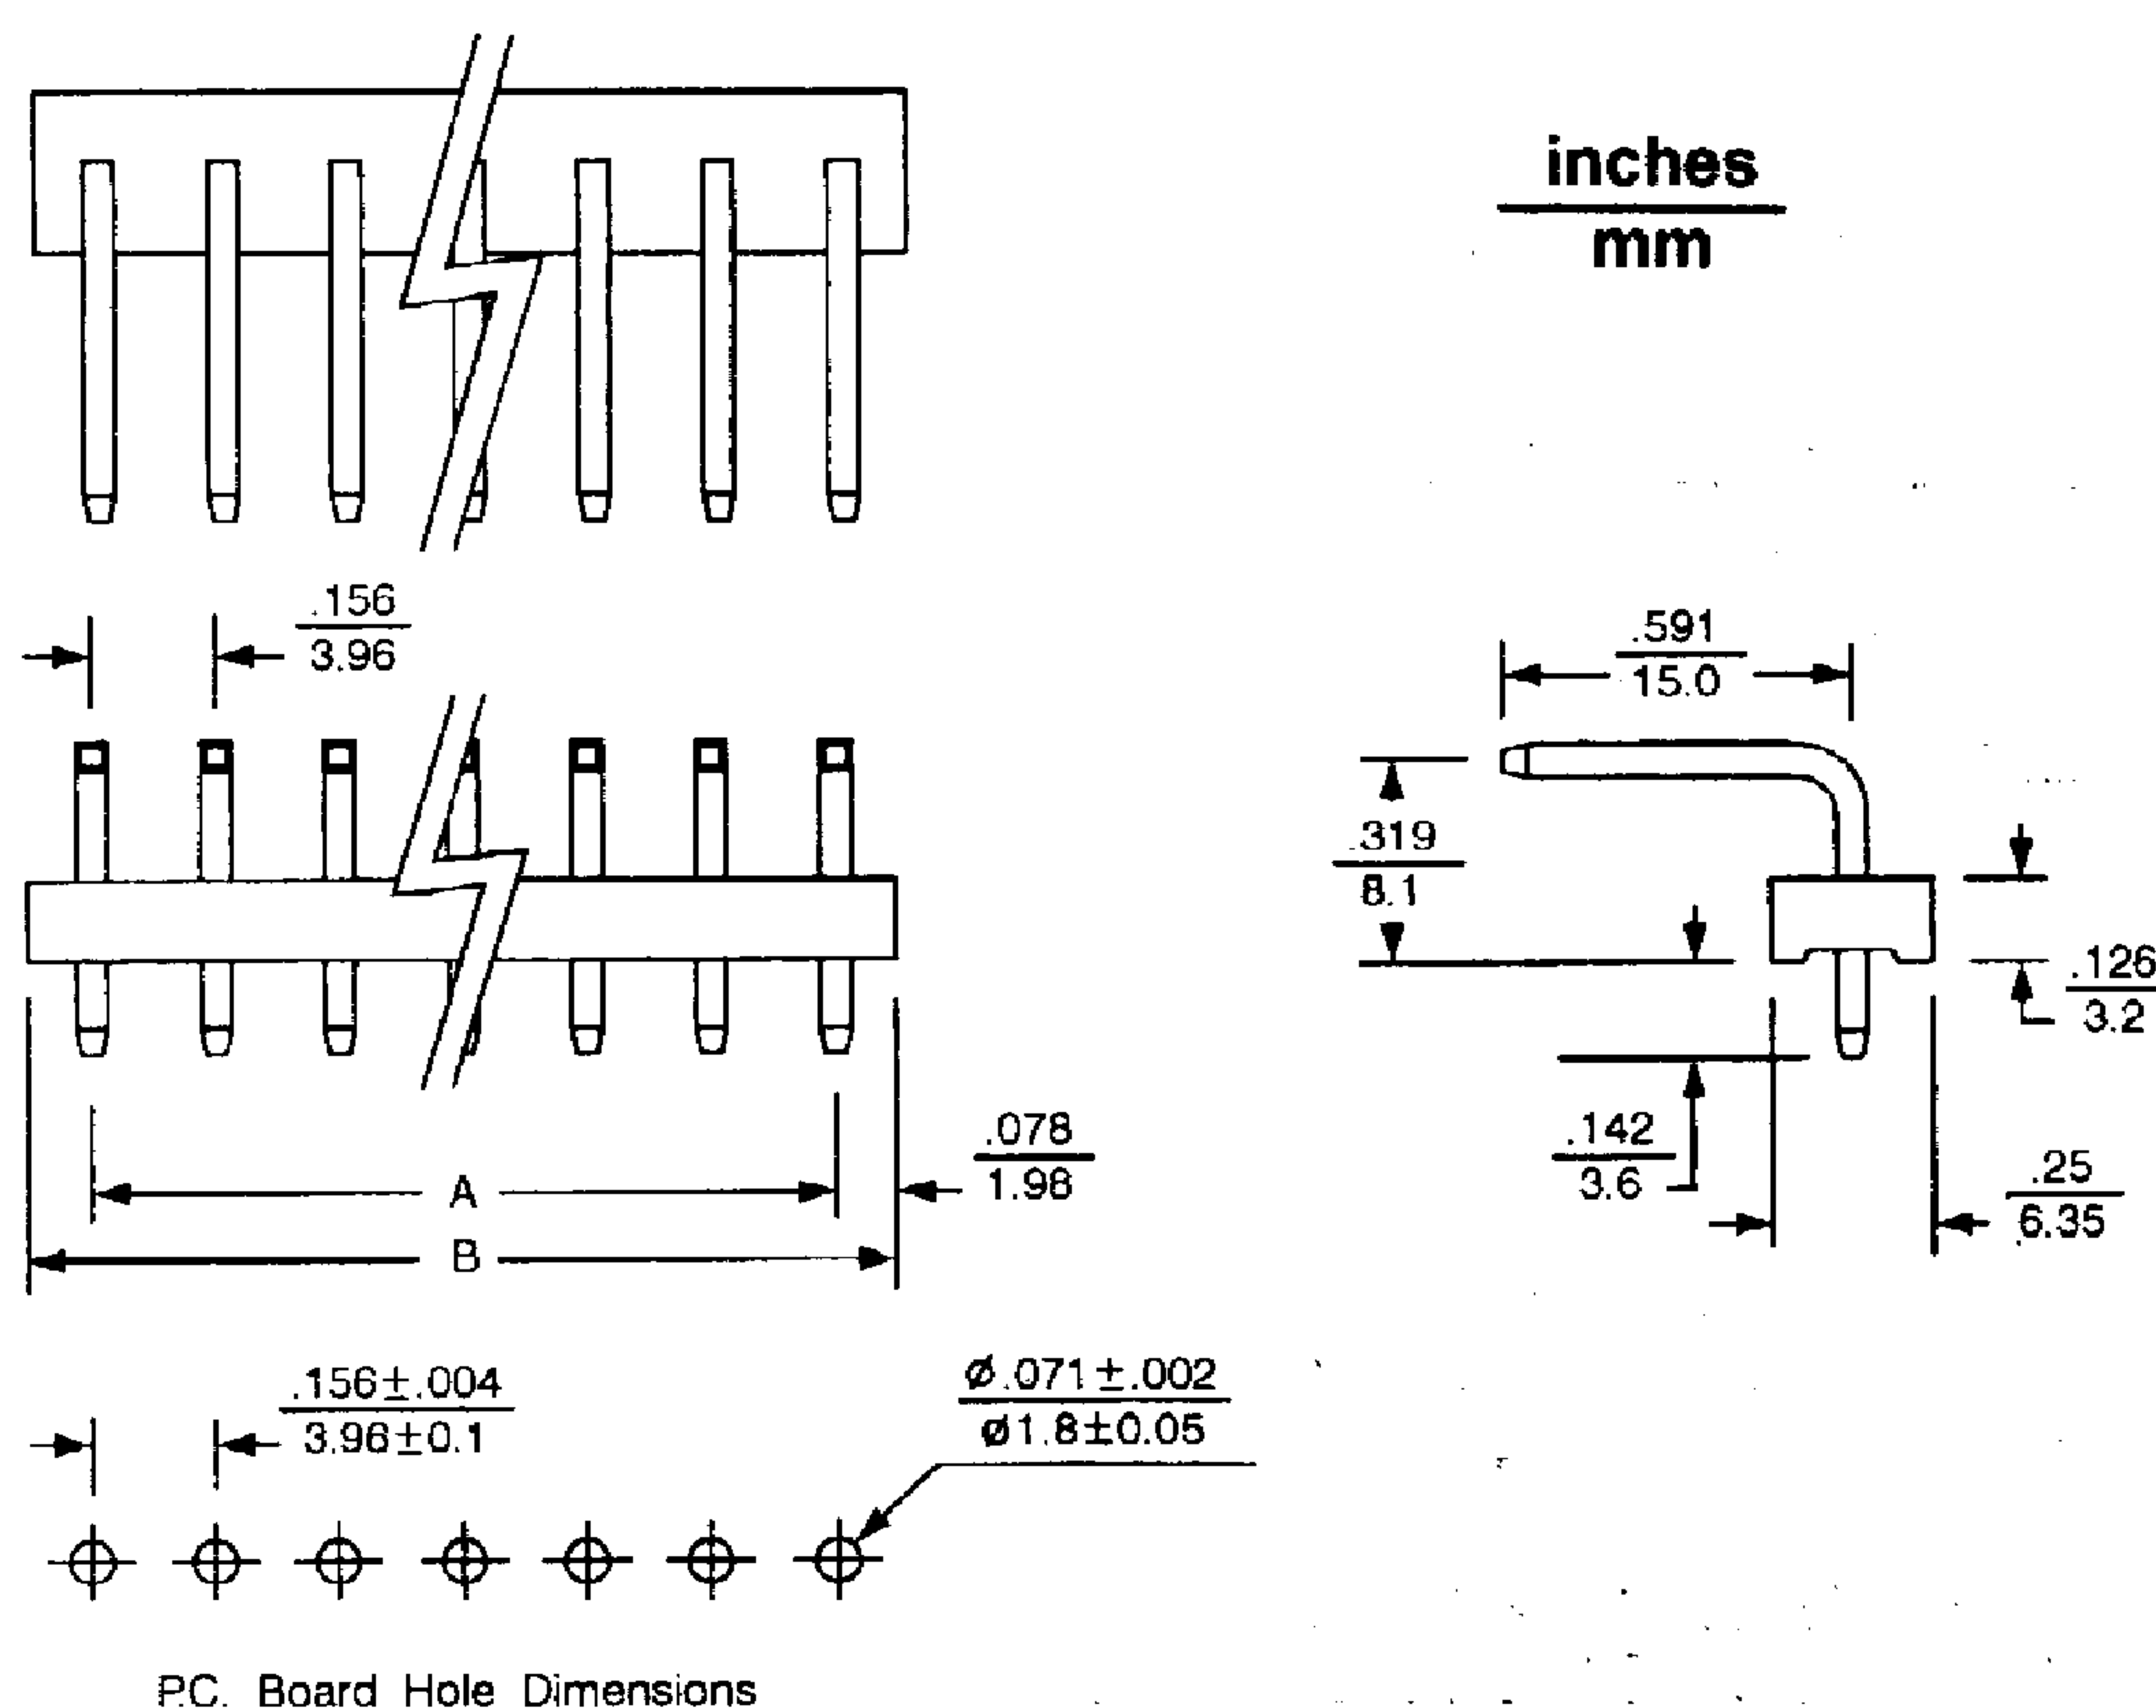

Dimensional Information - in (mm)

Circuits	Dim. A	Dim. B	Circuits	Dim. A	Dim. B	Circuits	Dim. A	Dim. B
2	.156 (3.96)	.312 (7.92)	6	.780 (19.80)	.935 (23.76)	10	1.403 (35.64)	1.559 (39.60)
3	.312 (7.92)	.468 (11.88)	7	.935 (23.76)	1.091 (27.72)	11	1.559 (39.60)	1.715 (43.56)
4	.468 (11.88)	.624 (15.84)	8	1.091 (27.72)	1.247 (31.68)	12	1.715 (43.56)	1.871 (47.52)
5	.624 (15.84)	.780 (19.80)	9	1.247 (31.68)	1.403 (35.64)			