

.250" (6.35mm) Right Angle Header

Specifications:

- Current rating: 13A (2-4P), 11A (6-10P)
- Voltage rating: 600V
- Dielectric withstanding voltage: 5000V AC/minute
- Ambient temperature rise: -55 °C ~ 105 °C

63501WR-N Series Right Angle Header


inches
mm

- 2 ~ 10 circuits available
- Pin Material: Tin-plated phosphor bronze
- Mates with 63501HM-N housing
- 63501WRM-N Mates with male terminal
- 63501WRF-N Mates with female terminal
- Material: nylon66, UL94V2 or UL94V0

Ordering Information

Part No.	Terminal Pin
63501WRM-N	Male
63501WRF-N	Female

&& xx = 02 ~ 10

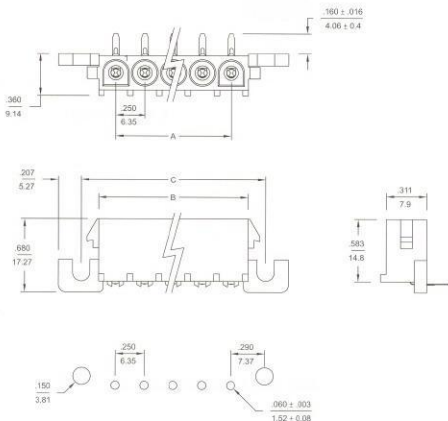

P. C. board layout

Dimensional Information (mm)

Circuits	Dim. A	Dim. B	Dim. C	Circuits	Dim. A	Dim. B	Dim. C
2	0.25 (6.35)	0.55 (13.97)	0.83 (21.08)	7	1.50 (38.10)	1.80 (45.72)	2.08 (52.83)
3	0.50 (12.70)	0.80 (20.32)	1.08 (27.43)	8	1.75 (44.45)	2.05 (52.07)	2.33 (59.18)
4	0.75 (19.05)	1.05 (26.67)	1.33 (33.78)	9	2.00 (50.80)	2.30 (58.42)	2.58 (65.53)
5	1.00 (25.40)	1.30 (33.02)	1.58 (40.13)	10	2.25 (57.15)	2.55 (64.77)	2.83 (71.88)
6	1.25 (31.75)	1.55 (39.37)	1.83 (46.48)				