


# .100" (2.54mm) Single Row Crimp Connector Housings

## 25407HMC Series

- 2 ~ 12 circuits available
- Material: UL 94V-0 glass filled polyester
- For use with 25407TF series terminal
- Standard Color: Black
- Mates with 25407HF housing
- Mates with 25407W series headers
- Anti-entanglement / overstress ribs prevent discrete wires from catching under latch during harness manufacturing and storage
- Positive latch secures the housing into mating part
- Front ribs prevent contact damage when unmating the connector from a header. The housing can't be twisted off pins

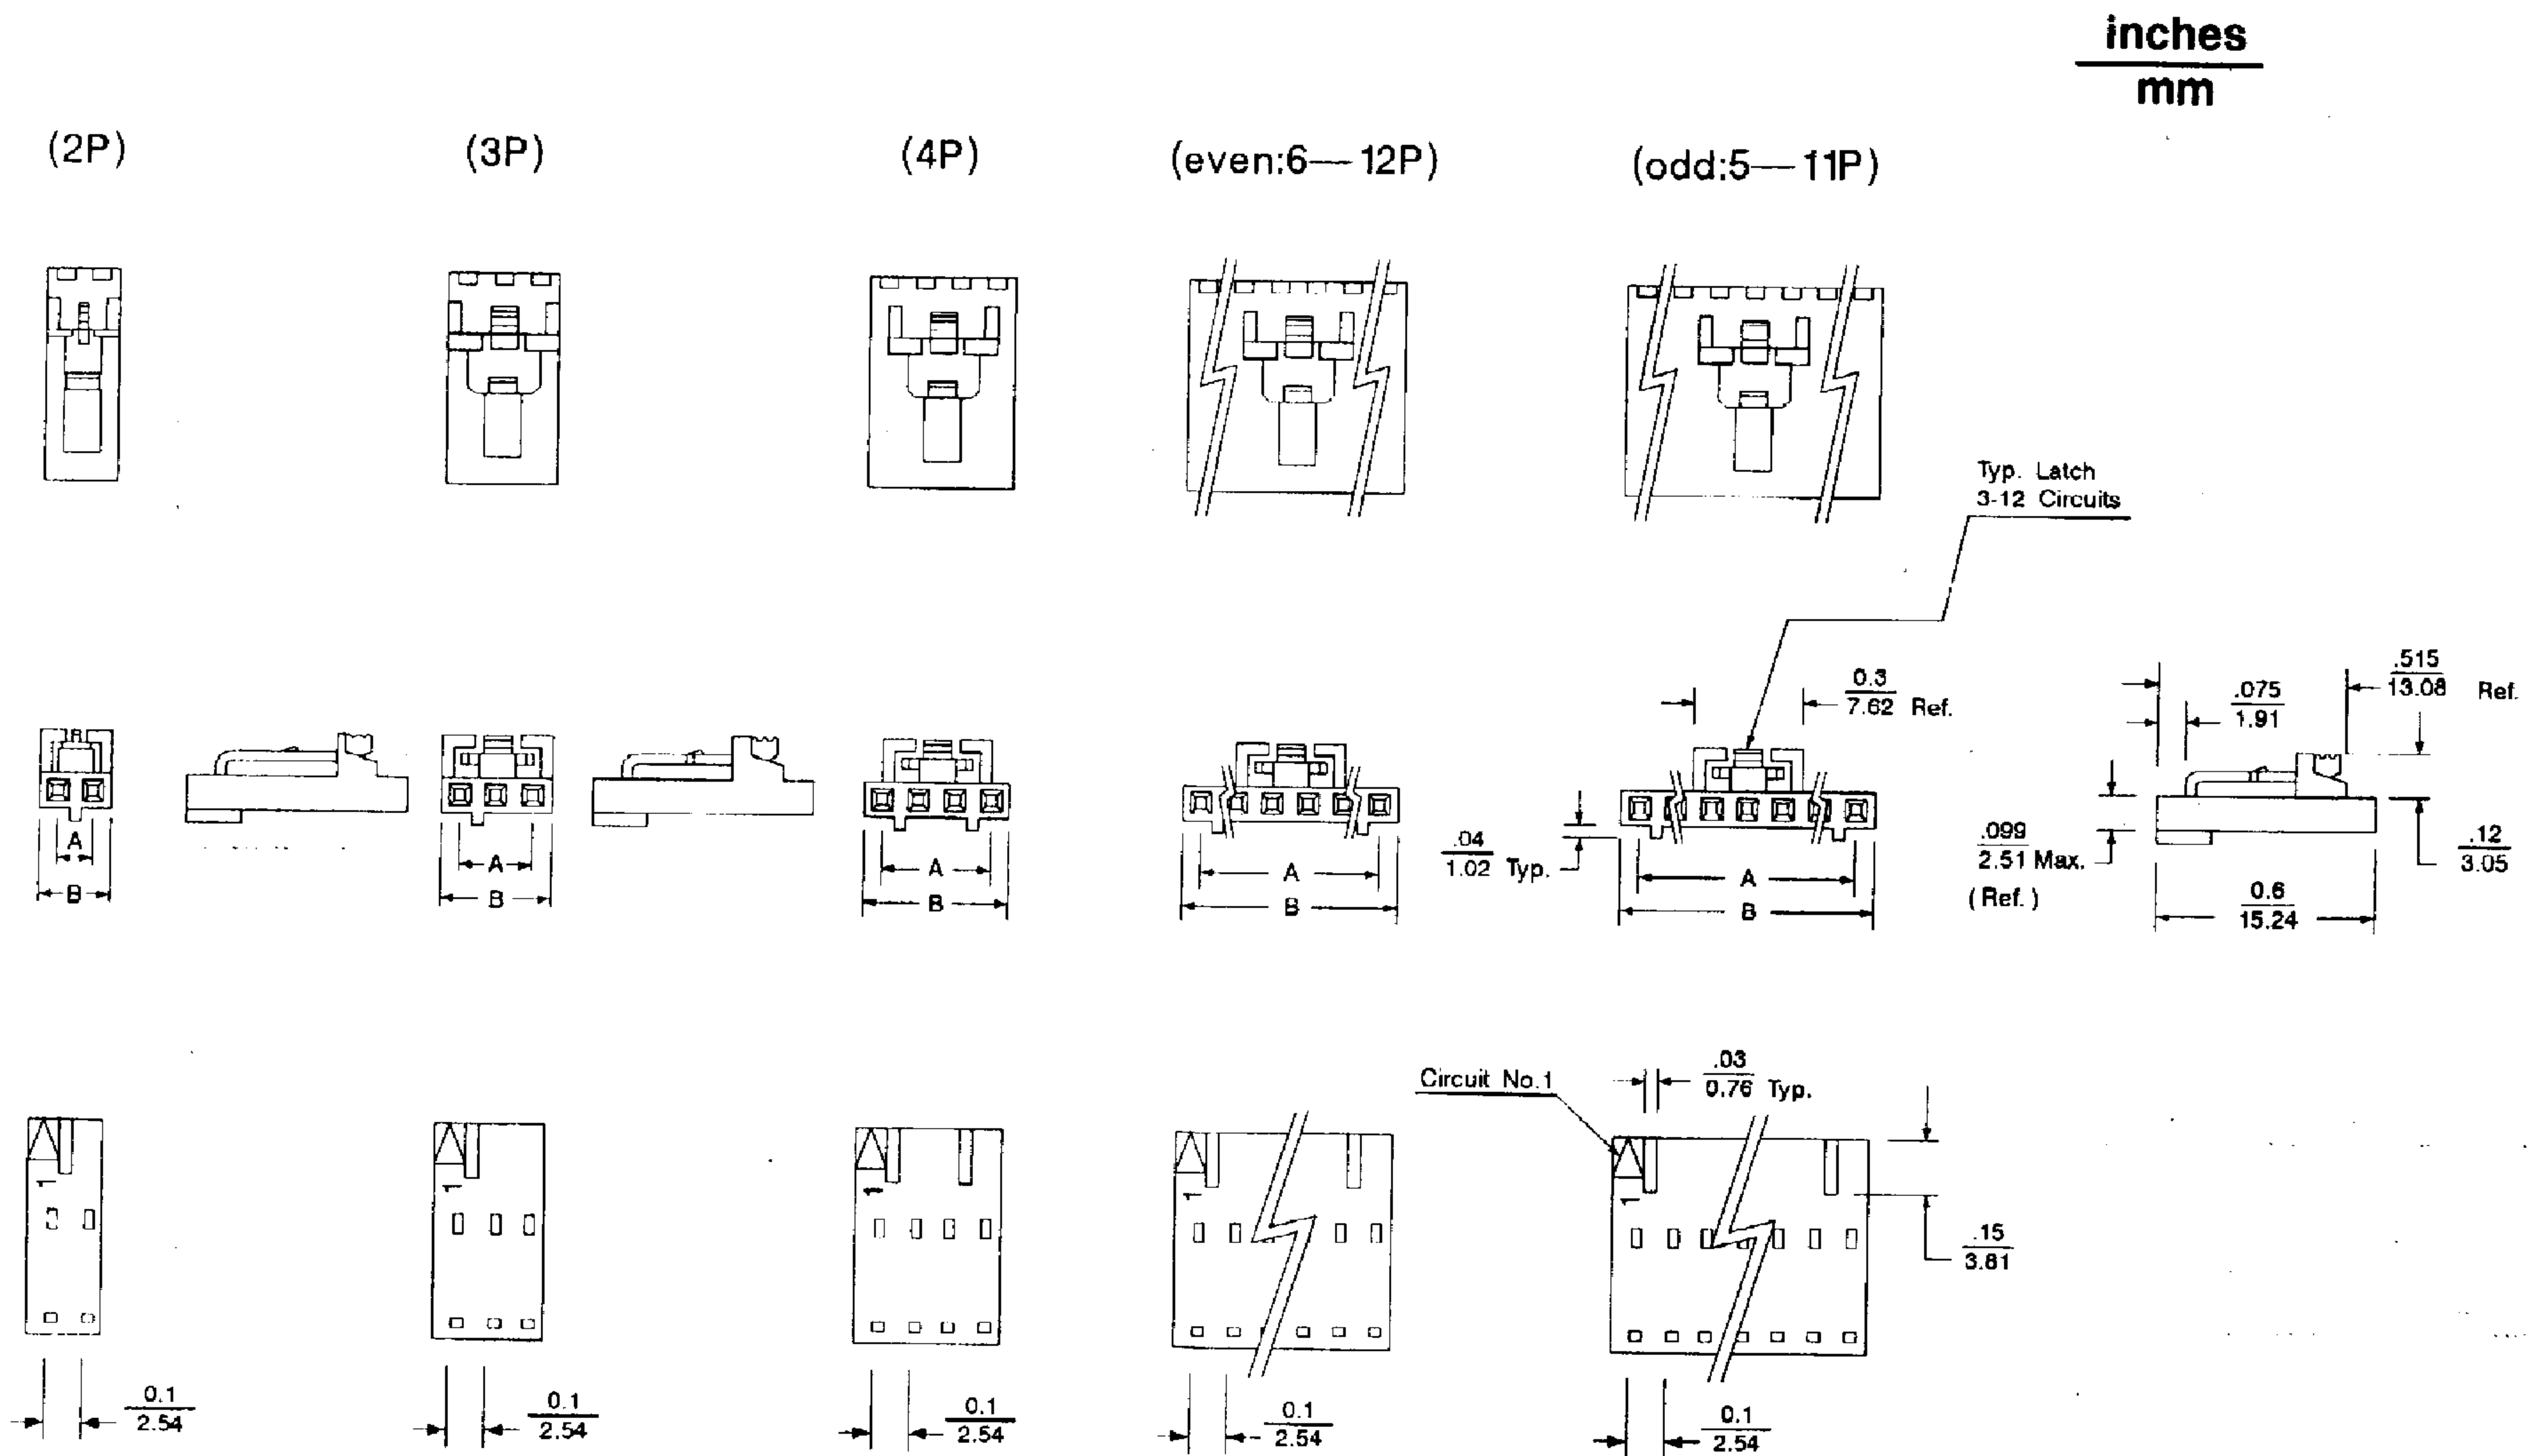

### Dimensional Information - in. (mm)

Circuits	Dim. A	Dim. B	Circuits	Dim. A	Dim. B
2	.100 ( 2.54)	.199 ( 5.05)	8	.700 (17.78)	.799 (20.29)
3	.200 ( 5.08)	.299 ( 7.59)	9	.800 (20.32)	.899 (22.83)
4	.300 ( 7.62)	.399 (10.13)	10	.900 (22.86)	.999 (25.37)
5	.400 (10.16)	.499 (12.67)	11	1.000 (25.40)	1.099 (27.91)
6	.500 (12.70)	.599 (15.21)	12	1.100 (27.94)	1.199 (30.45)
7	.600 (15.24)	.699 (17.75)			